

We offer tailor-made solutions for your transport needs.  
Please feel free to contact us if you have any questions.  
We are happy to advise you!

**Phone: +49 (0) 5101 9198-0**



### Specifications of moving-floor semitrailer

Weights:	Permissible	Technically feasible
Gross weight	36,000 kg	44,000 kg
Fifth-wheel load	12,000 kg	17,000 kg
Bogie load	24,000 kg	27,000 kg
Tare weight (standard*)	from 7,300 kg	
Dimensions:		
Coupling height	1,150 mm	
Total height	4,000 mm	
Loading length	13,500 mm	
Loading width	2,480 mm	
Wall height	2,700 mm / 2,800 mm	
Floor thickness	6* mm / 8 mm / 10 mm	
Load space	92m <sup>3</sup>	

Keep things moving forward!

## Moving-floor semitrailer



**Keep things moving forward!**



Carnehl Fahrzeugbau  
Pattensen GmbH & Co. KG  
Johann-Koch-Straße 13  
30982 Pattensen

Phone +49 (0)5101 9198-0  
Fax +49 (0) 5101 9198-33  
E-Mail info@carnehl.eu

[www.carnehl.eu](http://www.carnehl.eu)

Carnehl Fahrzeugbau  
Wittstock GmbH & Co. KG  
Friedrich-Ludwig-Jahn-Str. 2  
16909 Wittstock/Dosse

Phone +49 (0)3394 4719-0  
Fax +49 (0)3394 4719-129  
E-Mail wittstock@carnehl.eu




Removable discharge funnel (optional)



Central control panel for lateral



protection tarp (optional)

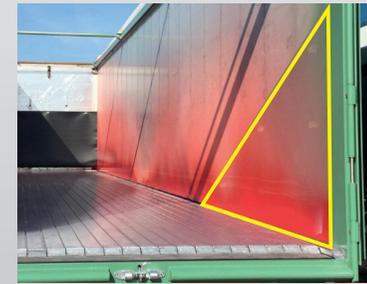

Sidewall wear panel (optional), custom dimensions upon request



Hinged crossbeam for unobstructed access or crane loading (optional)



Moving floor for agricultural goods



Keep things moving forward!

CARNEHL



4-bar locking system (optional)



Lashing rings, fold-out type, grain-proof (optional)



Floor assembly with full-length longitudinal reinforcement



External twist-bar locks



Floor protection tarp (optional)



Lifting rear crossbeam (standard variant)



Platform accessible from both sides



Door in bulkhead (optional)